

Spring finger contacts are used for grounding and dynamic connections on electronic assemblies.

These spring finger contacts (SMT) are designed to withstand tens of thousands of compression cycles. They are widely used for connections on automotive projects for example. These spring finger contacts are delivered in reel for automatic SMT assembly.


We provide compression rates and associated forces for each spring finger contact on request. Recommended compression is 20% to 40% of the overall contact height.

Spring finger contacts (SMT) can be standard (see our catalog below) or tailor-made.




PRODUCT SPECIFICATIONS

PROPERTY		VALUE TOLERANCE
Thickness		0,08 mm
Width		2,00 mm \pm 0,2
Length		3,50 mm \pm 0,2
Height		4,20 mm \pm 0,2
Basic material		Copper beryllium (CuBe)
Plating	Barrier layer NI Outer layer AU	1 μ m - 2 μ m 0.025 μ m - 0.075 μ m

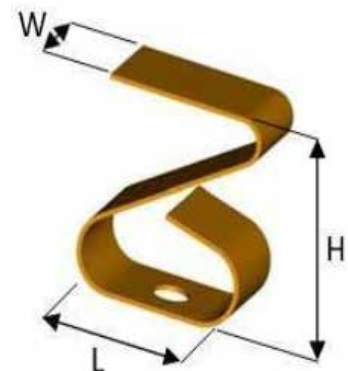


DIMENSIONS (mm)

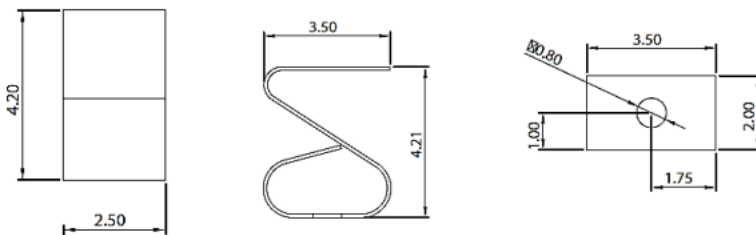


RECOMMENDED RESERVED AREA & PAD FOR THE PCB (mm)

RECOMMENDED RESERVED AREA ON THE PCB (mm)



RECOMMENDED PAD FOR THE PCB (mm)



DISCLAIMER

This is only a recommendation based on information available to COMPELMA at the time of printing. Actual land pattern can be significantly different due to various materials and processes used in PCB assembly. COMPELMA makes no representation or warranty of performance based on the recommended land pattern.

BUILDING AN ITEM NUMBER

OTG 20 35 042

①

②

③

④

① Contact Spring

② Width (ex : 1,5mm = 15)

③ Length (ex : 2,5mm = 15)


④ Height (ex : 85mm = 085)

Standard material is CuBe with gold plating.

For stainless material instead of CuBe material : add -S at the end of the reference.

For tin plating instead of gold plating : add -T at the end of the reference.

FORCE DEFLECTION DIAGRAM*

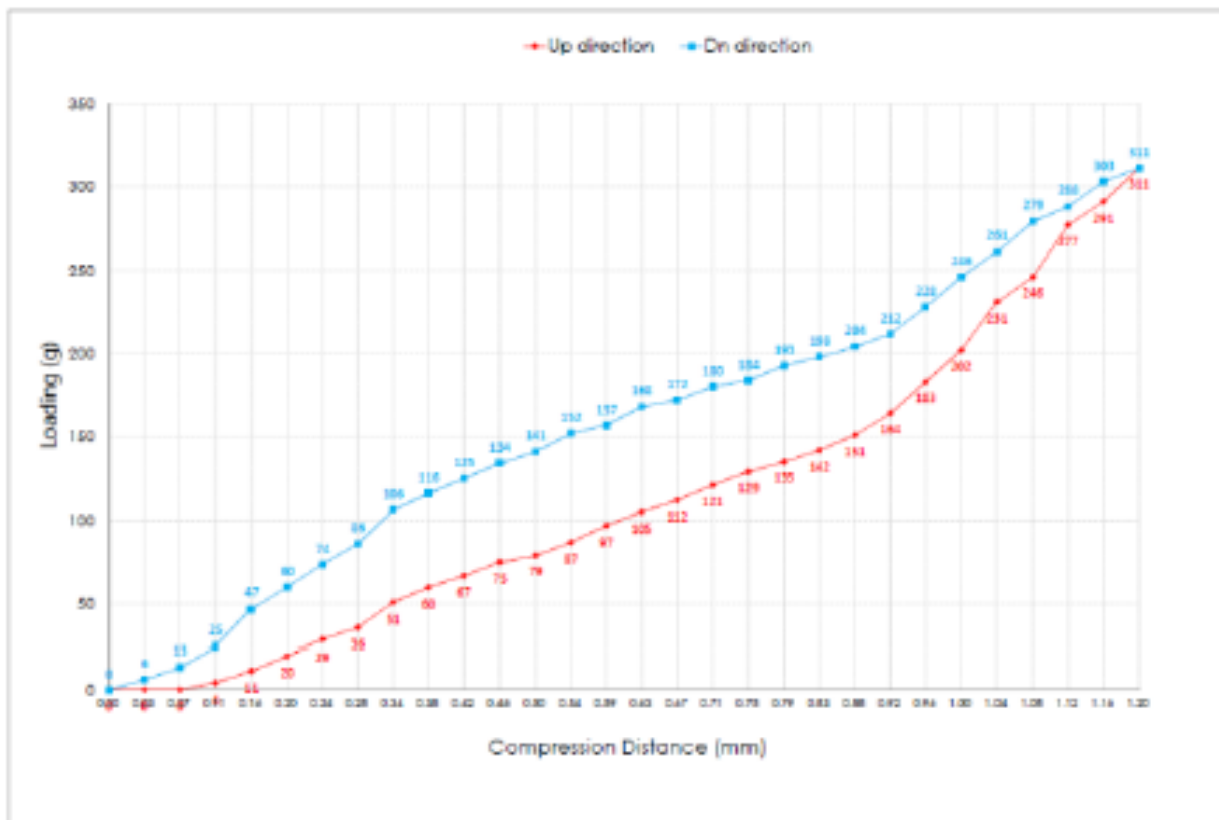

Total Compression Distance (mm)	1.20mm	
Displacement (mm)	Loading force (g) Down direction	Loading force (g) UP direction
0.00	0	0
0.05	6	11
0.10	11	21
0.15	16	31
0.20	21	41
0.25	26	51
0.30	31	61
0.35	36	71
0.40	41	81
0.45	46	91
0.50	51	101
0.55	56	111
0.60	61	121
0.65	66	131
0.70	71	141
0.75	76	151
0.80	81	161
0.85	86	171
0.90	91	181
0.95	96	191
1.00	101	201
1.05	106	211
1.10	111	221
1.15	116	231
1.20	121	241

Total Compression Distance (mm)	1.20mm	
Displacement (mm)	Loading force (g) Down direction	Loading force (g) UP direction
0.67	173	112
0.71	180	121
0.75	184	129
0.79	189	138
0.83	198	142
0.88	204	151
0.92	212	164
0.96	228	183
1.00	244	202
1.04	261	221
1.08	279	246
1.12	298	272
1.16	320	291
1.20	311	311

NOTE

*Only valid for gold plated version